

Data Communication & Networks

Spring 2008 Semester

Roll Number _____

Name _____

Section _____ Signature: _____

MID I

Friday, 15th February 2008

Total Time: 60 Minutes

Total Marks: 40

Signature of Invigilator

Course Instructors:

Engr. Shahid Qurashi, Engr. Waleed Ejaz

Q	1	2	3	4	5	6	7	Total
Marks	Zero	8	6	9	7	10	Zero	40
Obtained Marks								

You are advised to READ these notes:

1. Attempt the paper on the question paper. **NO EXTRA SHEETS** will be provided. Use the back of the page if more space is required. However, no extra sheet will be checked.
2. After asked to commence the exam, please verify that you have **nine (9) different printed pages** including this title page.
3. There are **7 questions**. Attempt all of them. It is advisable to go through the paper once before starting with the first question.
4. All questions don't carry **equal marks**. Marks for subparts are indicated.
5. **Suggested time** for each question is also indicated but this is not hard and fast, it's just for your convenience.
6. If part of a problem depends on a previous part that you are unable to solve, explain the method for doing the current part, and, if possible, give the answer in terms of the quantities of the previous part that you are unable to obtain.
7. Exam is closed books, closed notes. Please see that the area in your threshold is clean. You will be charged for any material which can be classified as 'helping in the paper' found near you.
8. Calculator sharing is strictly prohibited.
9. Students who attempt the paper with **lead pencils** lose the right to get them rechecked.
10. The invigilator present is not supposed to answer any questions. No one may come to your room for corrections and you are not supposed to request to call anyone. Make assumptions wherever required and clearly mark them.

Question 1**[0]****[Suggested Time: 4.5 min]**

Take a look at whole paper.

Question 2**[3+1+1+1+2]****[Suggested Time: 12 min]**

A bit stream 10011101 is transmitted using the standard CRC method. The generator polynomial is $x^3 + 1$ (i.e. x-cube + 1).


- a. Show the actual bit string transmitted.

Transmitted Bit String:

- b. Will this generator polynomial detects all single bit errors? If yes then why? If no then why?

- c. Up to what length all burst errors will be detected using this generator polynomial? Give reason also?

- d. Will generator polynomial detects all odd numbers of errors? If yes then why? If no then why?




- e. Suppose the third bit from the left is inverted during transmission. Show that this error is detected at the receiver's end.

Question 4


[3+4+2] [Suggested Time: 10 min]

- a. Suppose the waveform below comes from a Manchester encoded binary data stream for which the rate is $1/T$ bps. Determine the beginning and end of bit periods (i.e., extract timing information), and give the binary data sequence.

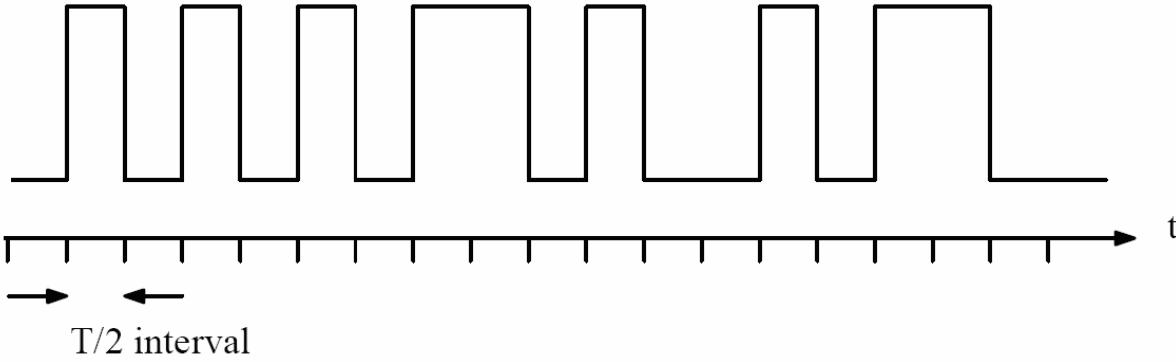


Binary Data Sequence:

- b. Now assume that the waveform represents differential Manchester coding, and find the two possible bit streams.

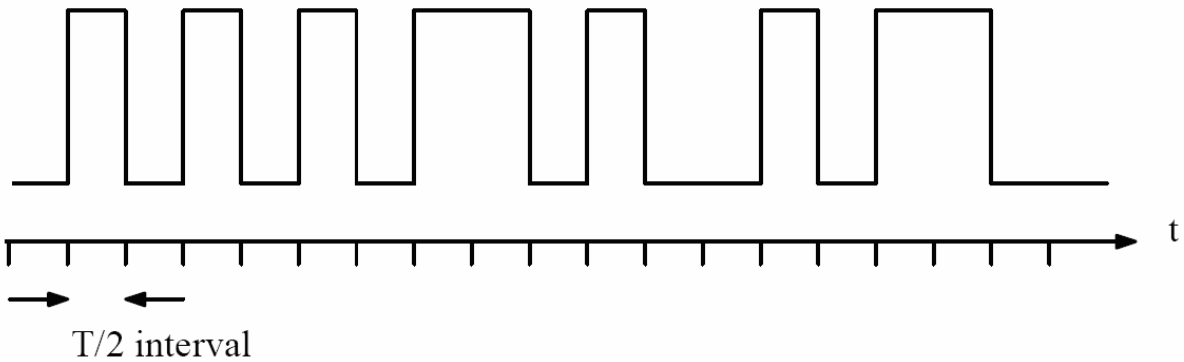


First Possible Binary Data Sequence:

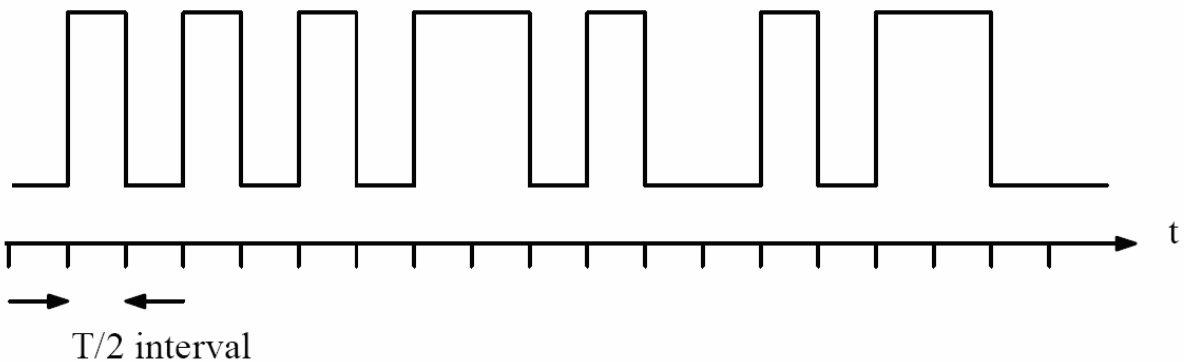

Second Possible Binary Data Sequence:

- c. The bipolar-AMI waveform representing the binary sequence 0100101011 is transmitted over a noisy channel. The received waveform is shown in Figure below, it contains a single error. Locate the position of this error.

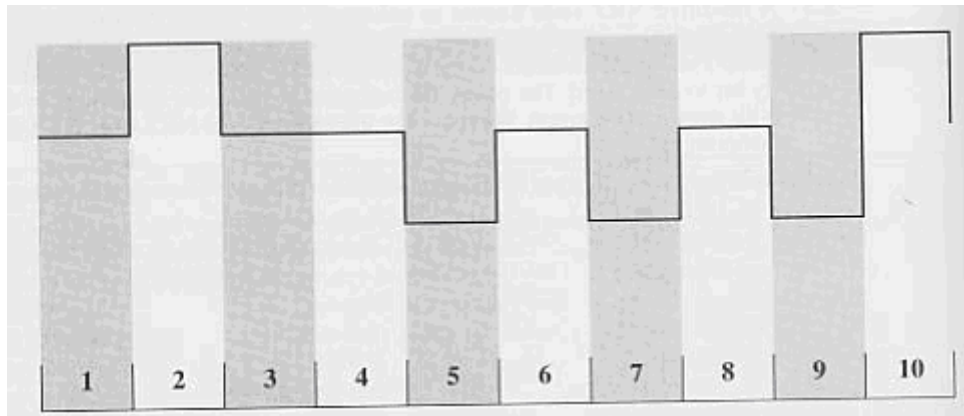

Position of Error:

Question 5**[4+1.5+1.5] [Suggested Time: 10 min]**

- a. Draw the constellation diagram for the following cases. Find the peak amplitude value for each case and define the type of modulation (ASK, FSK, PSK or QAM). The number in the parenthesis define the values of I and Q (x-axis and y-axis) respectively.
- Two points at (3, 0) and (2, 0)
 - Two points at (0, 3) and (0,-3)
 - Four points at (3, 3), (-3, 3), (-3,-3) and (3,-3)
 - Four points at (2,0), (4,0), (-2,0), (-4,0)

i.	ii.
Type of Modulation:	Type of Modulation:
iii.	iv.
Type of Modulation:	Type of Modulation:

- b. What is significance of twists in twisted pair cables?

- c. How cladding is different from core of optical fiber cable? And what is the purpose of cladding in optical fiber?

Question 6

[4+2+2+2]


[Suggested Time: 11 min]

- a. For n devices in the network, what is the number of cable links required for a mesh, ring, bus and star topology?

Mesh	Ring
Bus	Star


- b. A cable company uses one of the cable TV channels (with a bandwidth of 6MHz) to provide digital communication for each resident. What is the available data rate for each resident if company uses a 128-QAM technique?

- c. Four data channels (digital), each transmitting at 1 Mbps, use a satellite channel of 1 MHz. Design an appropriate configuration, using FDM.

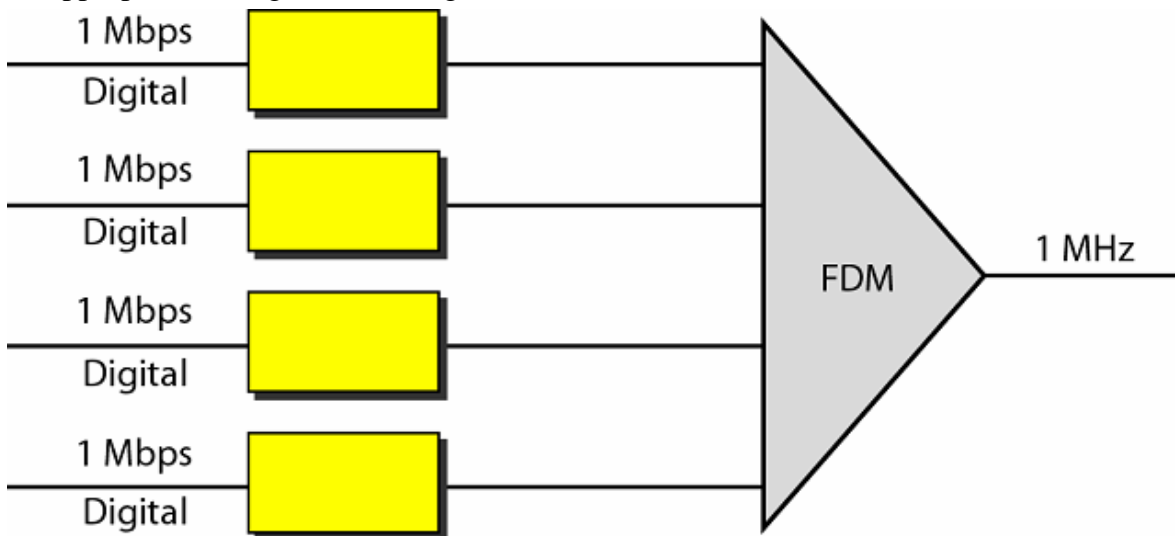


d. Figure below shows a multiplexer. Show output stream for synchronous and statistical TDM Systems?

Synchronous TDM

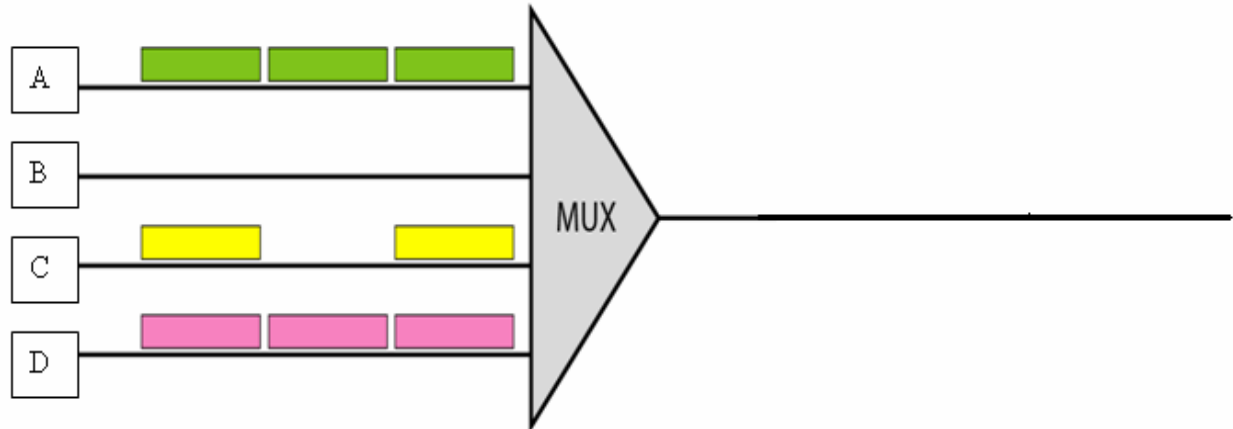

Statistical TDM

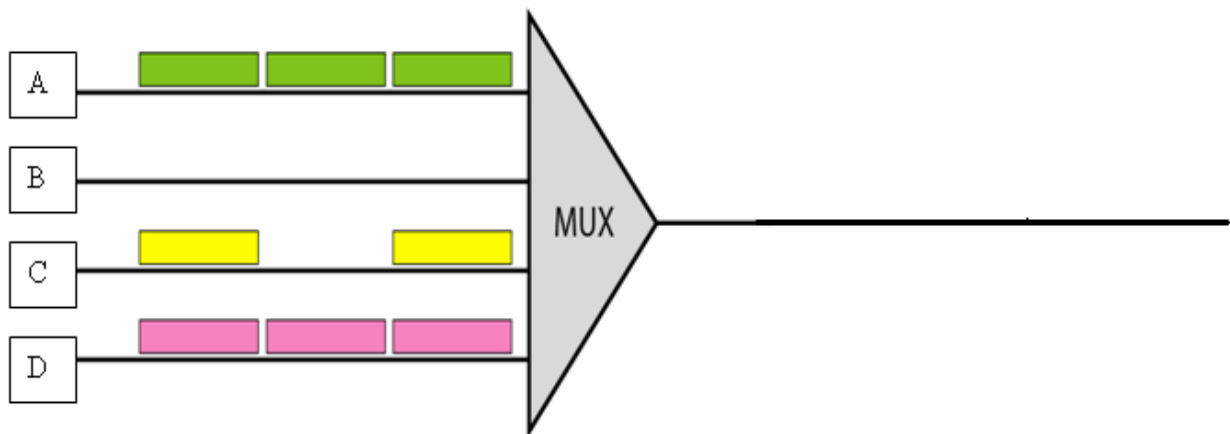

Question 7

[0]

[Suggested Time: 4.5 min]

Just recheck your answers.